

■ **Features**


- I_o 4.0A
- V_{RRM} 200V~800V
- Glass passivated chip
- High surge forward current capability

■ **Applications**

- General purpose 1 phase Bridge rectifier applications

Outline Dimensions and Mark

Unit: mm

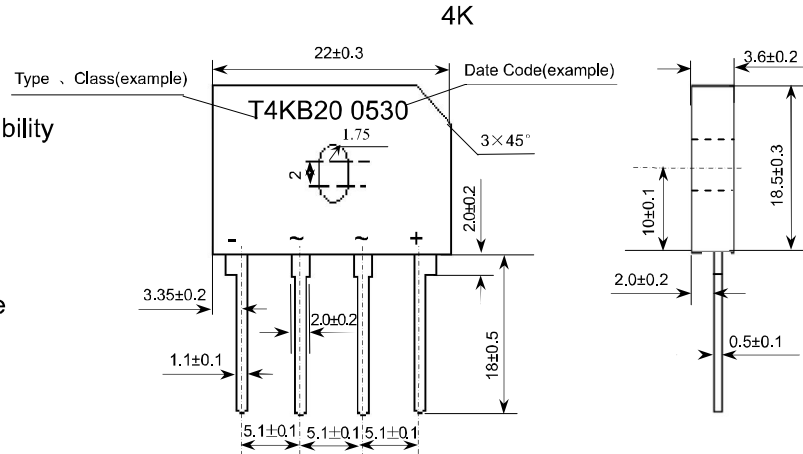





■ **Limiting Values (Absolute Maximum Rating)**

Item	Symbol	Unit	Conditions	T4KB			
				20	40	60	80
Storage Temperature	T_{stg}	°C		-40 ~ +150			
Junction Temperature	T_j	°C		+150			
Repetitive Peak Reverse Voltage	V_{RRM}	V		200	400	600	800
Average Rectified Output Current	I_o	A	50Hz sine wave, R-load,	With Heatsink $T_c=110^{\circ}C$			
				Without Heatsink $T_a=25^{\circ}C$			
Surge(Non-repetitive)Forward Current	I_{FSM}	A	50Hz sine wave, 1 cycle, $T_a=25^{\circ}C$	150			
Current Squared Time	I^2t	A ² s	$1ms \leq t < 8.3ms$ $T_j=25^{\circ}C$, Rating of per diode	112			
Dielectric Strength	Vdis	kV	Terminals to case, AC 1 minute	2			
Mounting Torque	TOR	kg · cm	Recommend torque: 5kg · cm	8			

■ **Electrical Characteristics** ($T_a=25^{\circ}C$ Unless otherwise specified)

Item	Symbol	Unit	Test Condition	Max
Peak Forward Voltage	V_{FM}	V	$I_{FM}=4.0A$, Pulse measurement, Rating of per diode	1.0
Peak Reverse Current	I_{RRM1}	μA	$V_{RM}=V_{RRM}$, Pulse measurement, Rating of per diode,	5
Thermal Resistance	$R_{\theta J-A}$	°C/W	Between junction and ambient, Without heatsink	23
	$R_{\theta J-L}$		Between junction and lead, Without heatsink	4.2
	$R_{\theta J-C}$		Between junction and case, With heatsink	5.5

Characteristics(Typical)

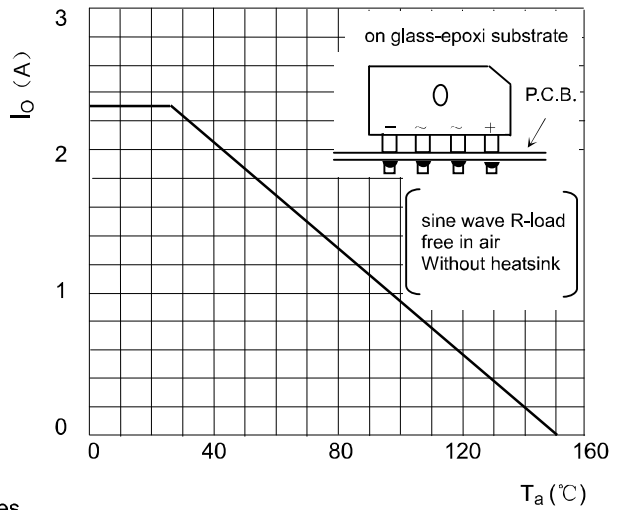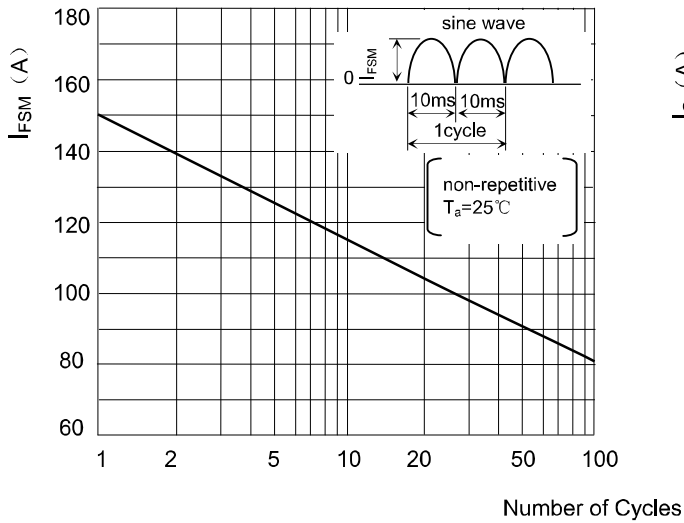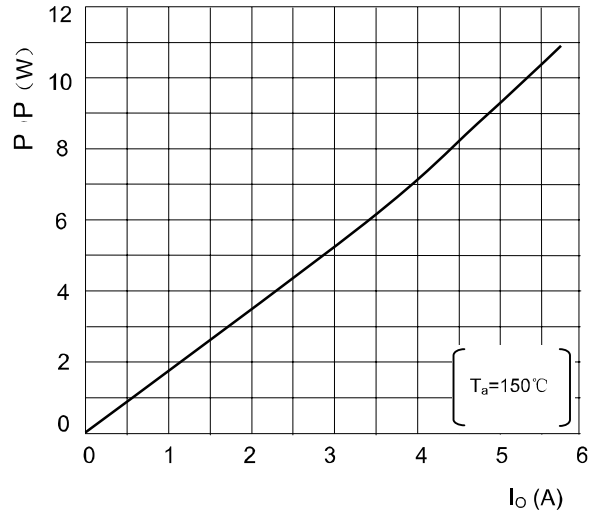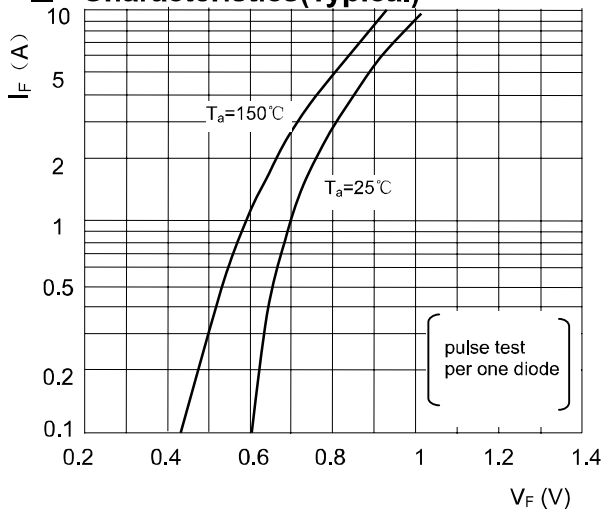

Surge Forward Current Capability

IO-Ta Curve

