



QLA2462

Dual-Port, 4Gbps Fibre Channel-to-PCI-X 2.0 266-MHz Adapter

High Performance


- 300,000 IOPS delivers high I/O transfer rates for storage applications.
- Intelligent interleaved DMA (iiDMA) ensures maximum utilization of data links.
- Out-of-order frame reassembly (OoOFR) reduces congestion and retransmissions.

Superior Scalability

- Multi-ID and N_Port virtualization ready. Allows physical ports to be part of multiple logical networks.
- Cisco® VSAN ready. Allows physical ports to be part of multiple logical networks.
- Comprehensive operating system (OS) driver support including Windows®, Linux®, Solaris®, NetWare®, Mac OS®, Citrix®, Oracle®, and VMware®.
- Universal boot support manages multiple hardware platforms and boot options.

Enhanced Reliability

- Overlapping protection domains for continuous protection of internal data paths.
- T10 cyclic redundancy check (CRC) ensures end-to-end data integrity across storage area networks (SANs).
- Three LEDs display real-time status and link activity information.

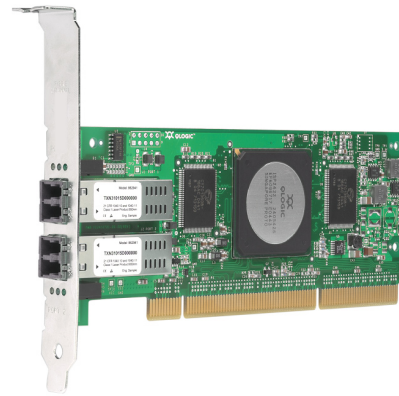

QLA®2462 Host Bus Adapter. The QLA2462 is the industry's first, true enterprise class, 4Gbps-to-PCI-X® 2.0 adapter. The QLA2462 delivers unprecedented levels of performance and availability, as well as intelligent networking features specific to enterprise class data centers.

Enterprise Class Features. The QLA2462 is the highest performing and most reliable adapter in the industry. It delivers unmatched performance by leveraging a single ASIC design, combining a unique hardware architecture to deliver over 300,000 IOPS, nearly 1.6GBps throughput, and support for the PCI-X 2.0 266-MHz double data rate (DDR) bus speed. More importantly, the QLA2462 provides new intelligent storage networking features that redefine the enterprise class adapter, including increased data protection, advanced frame routing, and enhanced enterprise-wide management capabilities.

Simplified Setup. Point-and-click installation and configuration wizards simplify the adapter setup process. Storage administrators can quickly deploy adapters across a SAN using standard adapter management tools and device utilities. The QLA2462 is fully compatible with SNIA API and SMI-S, thereby allowing administrators to manage QLogic adapters using third-party software applications.

Comprehensive OS Support. QLogic offers the broadest range of support for all major operating systems to ensure OS and hardware server compatibility. Drivers are available for all major operating systems and hardware server platforms. A single driver strategy per OS allows storage administrators to easily deploy and manage adapters in heterogeneous SAN configurations.

Guaranteed Interoperability. Storage partner certifications, combined with agency and regulatory testing, ensures that all products meet world compliance hardware and software specifications. All adapters are tested extensively with third-party hardware, along with multiple software applications, to ensure best-in-class SAN interoperability and compatibility. You can be confident purchasing QLogic adapters to meet your Fibre Channel storage networking needs.

Investment Protection. For over 15 years, QLogic has been a technological leader with products that address the customer's current needs. In addition, QLogic provides strong investment protection to support emerging technologies and standards. QLogic stands alone in the industry with its product portfolio depth and experience in successfully delivering technological solutions that address the needs of today and tomorrow.

QLA2462 Dual-Port, 4Gbps Fibre Channel-to-PCI-X 2.0 266-MHz Adapter

Host Bus Interface Specifications

Bus interface

- 64-bit, PCI-X 2.0 266MHz DDR, compatible with 66/33MHz PCI and 133/100/66MHz PCI-X

Signal voltage

- 3.3V (mode 1), 3.3V/1.5V (mode 2)

Memory

- 1MB SRAM per port, 1MB flash (SPI), and 2KB NVRAM (SPI)

Hardware platforms

- IA32 (x86), IA64, IEM64T, AMD Opteron™ 64, Sun™ SPARC®, Apple® G5 (Xserve® and Power Mac®)

Compliance

- PCI Local Bus Specification, revision 2.3, PCI-X Protocol Addendum to the PCI Local Bus Specification, revision 2.0a, PCI-X Electrical and Mechanical Addendum (revision 2.0a) to the PCI Local Bus Specification, PCI Bus Power Management Interface Specification revision 1.1, PCI Hot Plug Specification, revision 1.0

Fibre Channel Specifications

Data rate

- 4/2/1 Gbps auto-negotiation (4.2480/2.1240/1.0625 Gbps)

Performance

- 150,000 IOPS per port

Topology

- Point-to-point (N_Port), arbitrated loop (NL_Port), switched fabric (N_Port)

Logins

- Support for F_Port and FL_Port login: 2,048 concurrent logins, and 2,048 active exchanges per port

Class of service

- Class 2 and 3

Protocols

- FCP (SCSI-FCP), FC-TAPE (FCP-2)

Compliance

- SCSI-3 Fibre Channel Protocol (SCSI-FCP), Fibre Channel Physical and Signaling Interface (FC-PH), Fibre Channel 2nd Generation (FC-PH-2), Third Generation Fibre Channel Physical and Signaling Interface (FC-PH-3), Fibre Channel-Arbitrated Loop (FC-AL-2), Fibre Channel Fabric Loop

Attachment Technical Report (FC-FLA), Fibre Channel-Private Loop Direct Attach Technical Report (FC-PLDA), Fibre Channel Tape (FC-TAPE) profile, SCSI Fibre Channel Protocol-2 (FCP-2), Second Generation FC Generic Services (FC-GS-2), Third Generation FC Generic Services (FC-GS-3), Fibre Channel Framing and Signaling (FC-FS)

Physical Specifications

Ports

- Dual 4Gbps Fibre Channel

Connections

- Small form factor fixed (SFF) multimode optic with LC-style connector

Form factor

- Low-profile MD2: 16.93 cm × 5.15 cm (6.7 in. × 2.5 in.)

Bracket size

- Standard: 1.84 cm × 12.08 cm (.73 in. × 4.76 in.)
- Low-profile: 1.84 cm × 8.01 cm (.73 in. × 3.15 in.)

Environment and Equipment Specifications

Airflow (none)

Temperature

- Operating: 0°C/32°F to 55°C/131°F
- Storage: -20°C/-4°F to 70°C/158°F

Humidity

- Relative (non-condensing): 10% to 90%
- Storage: 5% to 95%

Power dissipation

- 8.0W (maximum)

Cable distances

- 1Gbps: 500 meters 50/125 μm fiber, 300 meters 62.5/125 μm fiber
- 2Gbps: 300 meters 50/125 μm fiber, 150 meters 62.5/125 μm fiber
- 4Gbps: 150 meters 50/125 μm fiber, 70 meters 62.5/125 μm fiber

Agency Approvals—Product Safety

US and Canada: UL, cUL: UL60950, CSA C22.2 No.60950, Class 1 Laser Product per DHHS 21CFR J

Europe

- 73/23/ECC Low Voltage Directive
 - TUV: EN60950-1: 2001, EN60825-1: 1994+A1+A2, EN60825-2: 1994 +A1

Agency Approvals—EMI and EMC

US: FCC Part 15, Class A

Canada: Industry Canada ICES-003, Class A

Europe: 89/336/EEC EMC Directive CE Mark, EN55022: 1998/CISPR22:1997 Class A, EN55024: 1998, EN61000-3-2:1995, EN61000-3-3:1994

Japan: VCCI, Class A

Taiwan: CNS 13438 Class A

New Zealand and Australia: AS/NZS 3548 Class A

Korea: MIC

Tools and Utilities

Management tools

- SANsurfer® Fibre Channel HBA Manager

Device utilities

- Command line interface; utilities for firmware, driver, boot code, NVRAM

Boot support

- BIOS, EFI, FCode

APIs

- SNIA API V2, SMI-S, FDMI

Operating systems

- Windows Server® 2003, 2008, 2008 R2; Windows 2000; Windows XP Pro; Windows Vista; Solaris 8, 9, 10; OpenSolaris™ 2008, 2009; Red Hat® RHEL 3.0, 4.0, 5.0; Novell SLES 8, 9, 10, 11; Novell NetWare 6.5; Mac OS X; Citrix XenServer™ 3.2 – 4.1, 5.0, 5.5; Oracle Enterprise Linux 4, 5; VMware ESX™/ESXi 3.5, 4.0

Ordering Information

QLA2462-CK

- Ships in an individually packed box with a standard-size bracket, a spare low-profile bracket, a SANsurfer Fibre Channel HBA Manager CD, and a Quick Start Guide

QLA2462-BK

- Ships in a bulk box in quantities of 20 and 50 with standard-size brackets



QLOGIC

The Ultimate in Performance



Corporate Headquarters QLogic Corporation 26650 Aliso Viejo Parkway Aliso Viejo, CA 92656 949.389.6000 www.qlogic.com

Europe Headquarters QLogic (UK) LTD. Quatro House Lyon Way, Frimley Camberley Surrey, GU16 7ER UK +44 (0) 1276 804 670

© 2004–2010 QLogic Corporation. Specifications are subject to change without notice. All rights reserved worldwide. QLogic, the QLogic logo, SANsurfer, and QLA are registered trademarks of QLogic Corporation. PCI-X is a trademark of PCI-SIG Corporation. Microsoft, Windows, Windows Server, Windows 2000, Windows XP Pro, and Windows Vista are trademarks or registered trademarks of Microsoft Corporation. Macintosh, Apple, Xserve, Power Mac, and Mac OS are registered trademarks of Apple, Inc. Novell and NetWare are registered trademarks of Novell, Inc. Sun, Solaris and OpenSolaris are trademarks or registered trademarks of Sun Microsystems, Inc. SPARC is a registered trademark of SPARC International, Inc. Linux is a registered trademark of Linus Torvalds. Red Hat is a registered trademark of Red Hat, Inc. AMD and Opteron are trademarks or registered trademarks of Advanced Micro Devices, Inc. Citrix and XenServer are trademarks or registered trademarks of Citrix Systems, Inc. Oracle is a registered trademark of Oracle Corporation. VMware, ESX, and ESXi are trademarks or registered trademarks of VMware, Inc. Cisco is a registered trademark of Cisco Systems, Inc. All other brand and product names are trademarks or registered trademarks of their respective owners. Information supplied by QLogic Corporation is believed to be accurate and reliable. QLogic Corporation assumes no responsibility for any errors in this brochure. QLogic Corporation reserves the right, without notice, to make changes in product design or specifications.